

Artikel Nr.: 862129

Netzgerät, ROUND, CC, RS700mA/8W












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	4,20-8,00 W	Leistungsfaktor	0,9
Ausgangsspannung	6-12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	700 mA		

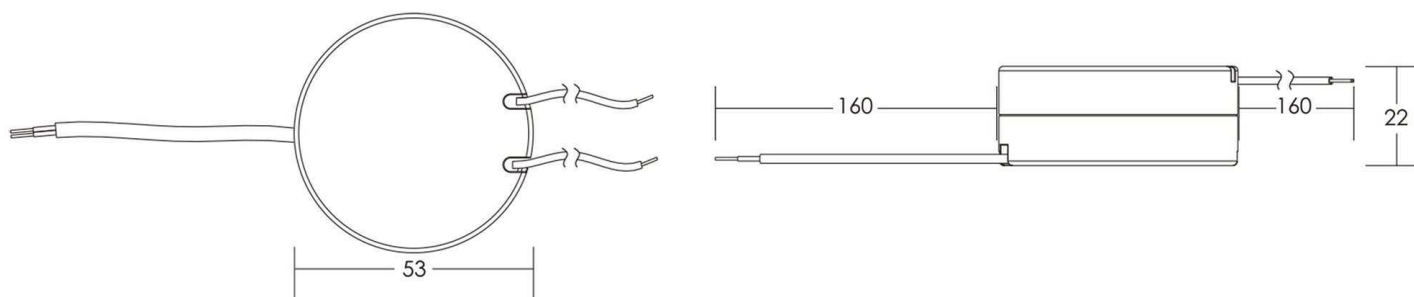
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	nicht dimmbar	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862129

Netzgerät, ROUND, CC, RS700mA/8W

**Abmessungen und Gewicht****Grenzwerte**

Länge	0,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	0,00 mm	Gehäusetemperatur	80 °C
Höhe	22,00 mm	max. Menge Sicherungsautomaten	B10A=11, B16A=18, C10A=24, C16A=39
Durchmesser	53,00 mm	max. Einschaltstrom	8A/300µs
Gewicht	53 g	kapazitive Last	46,24nF

Article No.: 862129

Power supply unit, ROUND, CC, RS700mA/8W

















IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	100-240V AC/50-60Hz
Power	4,20-8,00 W	Power factor	0,9
Output voltage	6-12V DC	Connection possibility	wire with open ends
Output current	700 mA		

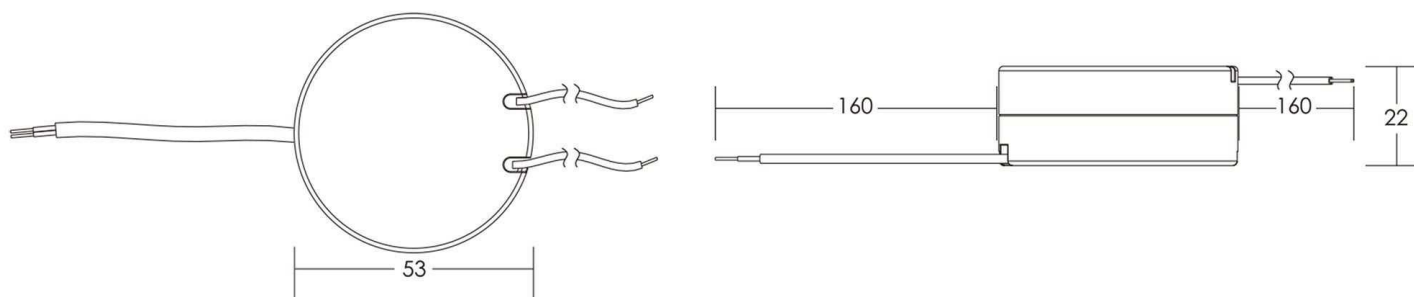
Product features

	Protection class II		Overvoltage protection
	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection		Standby-power consumption < 0,5 W
	Overheating protection		Safety according to EN 61347
	Safety transformer		Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable		Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862129

Power supply unit, ROUND, CC, RS700mA/8W

**Dimensions & Weight****Absolute maximum ratings**

Length	0,00 mm	Operating temperature	-20°C - +50°C
Width	0,00 mm	Case temperature	80 °C
Height	22,00 mm	max. amount of circuit breakers	B10A=11, B16A=18, C10A=24, C16A=39
Diameter	53,00 mm	max. inrush current	8A/300µs
Product weight	53 g	capacitive load	46,24nF