

Artikel Nr.: 862201

Netzgerät, BASIC, CC, V8-40-1050mA/40V



IP20 **CE**

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	20,00-40,00 W	Leistungsfaktor	0,95
Ausgangsspannung	19-38V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	1050 mA		

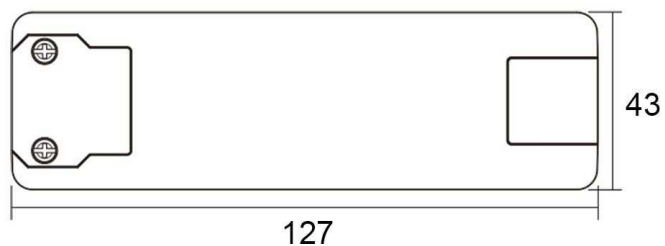
Produkteigenschaften

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862201

Netzgerät, BASIC, CC, V8-40-1050mA/40V

**Abmessungen und Gewicht****Grenzwerte**

Länge	127,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	43,00 mm	Gehäusetemperatur	90 °C
Höhe	28,00 mm	max. Menge Sicherungsautomaten	B10A=8, B16A=14, C10A=18, C16A=29
Durchmesser	0,00 mm	max. Einschaltstrom	20A/300µs
Gewicht	125 g	kapazitive Last	

Article No.: 862201

Power supply unit, BASIC, CC, V8-40-1050mA/40V












IP20 

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	20,00-40,00 W	Power factor	0,95
Output voltage	19-38V DC	Connection possibility	wire with open ends
Output current	1050 mA		

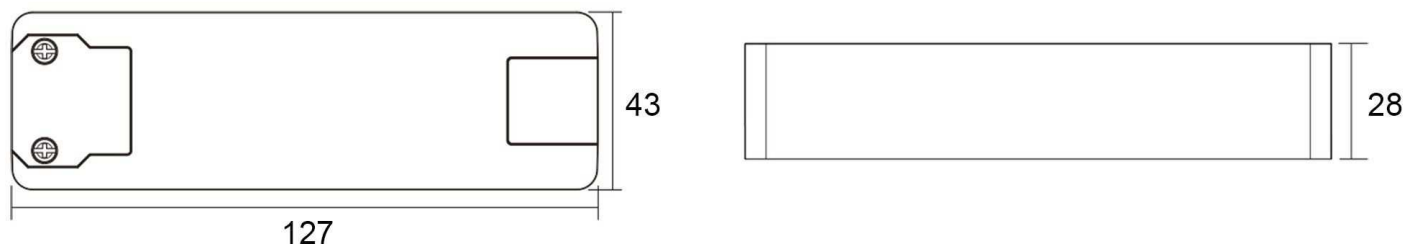
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862201

Power supply unit, BASIC, CC, V8-40-1050mA/40V

**Dimensions & Weight****Absolute maximum ratings**

Length	127,00 mm	Operating temperature	-20°C - +50°C
Width	43,00 mm	Case temperature	90 °C
Height	28,00 mm	max. amount of circuit breakers	B10A=8, B16A=14, C10A=18, C16A=29
Diameter	0,00 mm	max. inrush current	20A/300µs
Product weight	125 g	capacitive load	