

Artikel Nr.: 862204

Netzgerät, BASIC, DIM, CC, D35020UF/20W












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	9,80-20,00 W	Leistungsfaktor	0,95
Ausgangsspannung	28-57V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	350 mA		

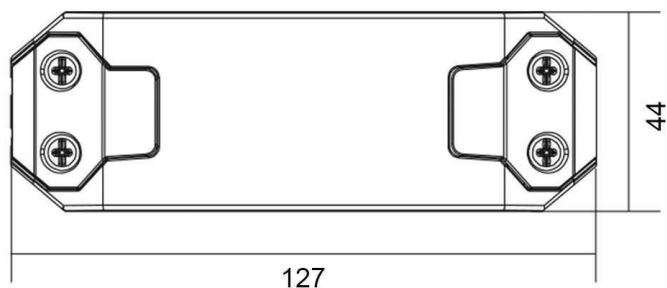
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - Phasen-/abschnitt	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862204

Netzgerät, BASIC, DIM, CC, D35020UF/20W

**Abmessungen und Gewicht****Grenzwerte**

Länge	127,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	44,00 mm	Gehäusetemperatur	90 °C
Höhe	28,00 mm	max. Menge Sicherungsautomaten	B10A=11, B16A=18, C10A=24, C16A=39
Durchmesser	0,00 mm	max. Einschaltstrom	15A/300µs
Gewicht	120 g	kapazitive Last	

Article No.: 862204

Power supply unit, BASIC, DIM, CC, D35020UF/20W



IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	9,80-20,00 W	Power factor	0,95
Output voltage	28-57V DC	Connection possibility	wire with open ends
Output current	350 mA		

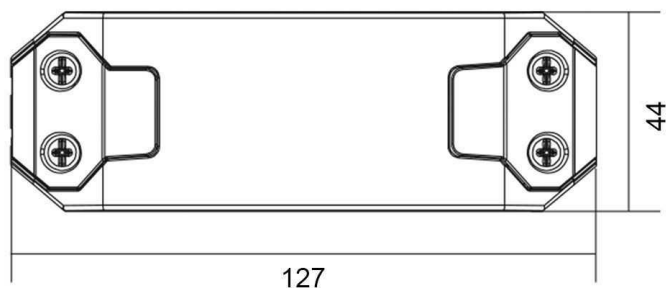
Product features

Protection class II	Overvoltage protection
SELV Low voltage protection	Lamp control gear 110
Short circuit protection	Suitable for furniture installation
Overload protection	ErP Standby-power consumption < 0,5 W
Overheating protection	LVD Safety according to EN 61347
Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
dimmable - leading/trailing edge	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862204

Power supply unit, BASIC, DIM, CC, D35020UF/20W

**Dimensions & Weight****Absolute maximum ratings**

Length	127,00 mm	Operating temperature	-20°C - +45°C
Width	44,00 mm	Case temperature	90 °C
Height	28,00 mm	max. amount of circuit breakers	B10A=11, B16A=18, C10A=24, C16A=39
Diameter	0,00 mm	max. inrush current	15A/300µs
Product weight	120 g	capacitive load	