

Artikel Nr.: 862210

Netzgerät, BASIC, DIM, CC, D105045NTF/45W












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	23,50-45,00 W	Leistungsfaktor	0,95
Ausgangsspannung	22-43V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1050 mA		

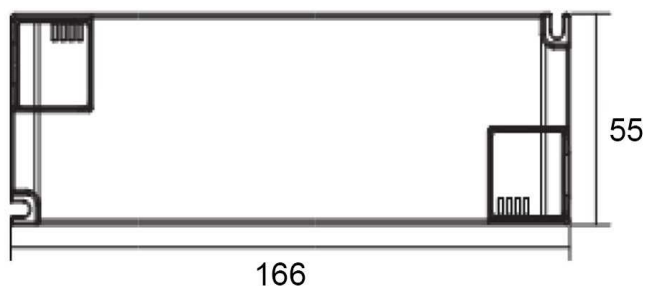
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - Phasen-/abschnitt	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862210

Netzgerät, BASIC, DIM, CC, D105045NTF/45W

**Abmessungen und Gewicht****Grenzwerte**

Länge	166,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	55,00 mm	Gehäusetemperatur	85 °C
Höhe	25,00 mm	max. Menge Sicherungsautomaten	B10A=140, B16A=224, C10A=280, C16A=440
Durchmesser	0,00 mm	max. Einschaltstrom	5A/100µs
Gewicht	180 g	kapazitive Last	

Article No.: 862210

Power supply unit, BASIC, DIM, CC, D105045NTF/45W












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	23,50-45,00 W	Power factor	0,95
Output voltage	22-43V DC	Connection possibility	clamp
Output current	1050 mA		

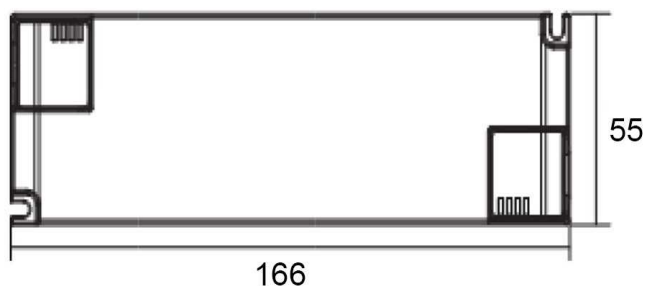
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862210

Power supply unit, BASIC, DIM, CC, D105045NTF/45W

**Dimensions & Weight****Absolute maximum ratings**

Length	166,00 mm	Operating temperature	-20°C - +45°C
Width	55,00 mm	Case temperature	85 °C
Height	25,00 mm	max. amount of circuit breakers	B10A=140, B16A=224, C10A=280, C16A=440
Diameter	0,00 mm	max. inrush current	5A/100µs
Product weight	180 g	capacitive load	