

Artikel Nr.: 862212

Netzgerät, ROUND, CC, RS350mA/8W












IP20 

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	3,20-8,00 W	Leistungsfaktor	0,9
Ausgangsspannung	9-23V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	350 mA		

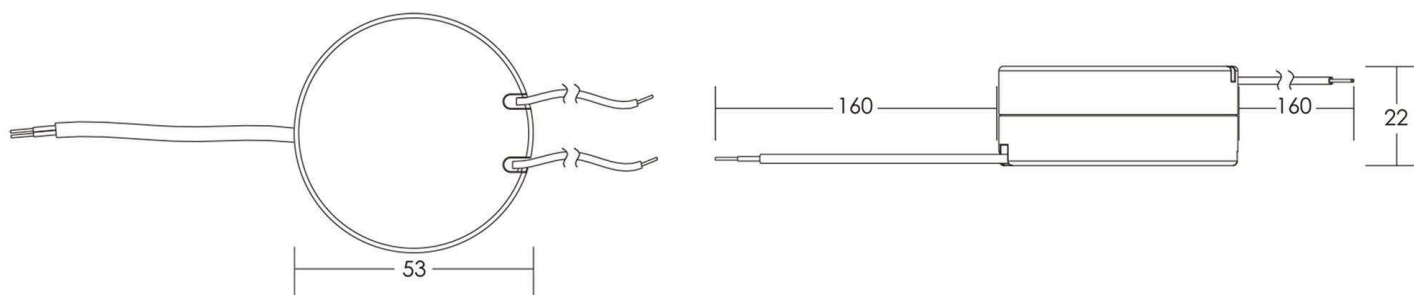
Produkteigenschaften

 Schutzklasse II	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862212

Netzgerät, ROUND, CC, RS350mA/8W

**Abmessungen und Gewicht****Grenzwerte**

Länge	0,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	0,00 mm	Gehäusetemperatur	80 °C
Höhe	22,00 mm	max. Menge Sicherungsautomaten	B10A=17, B16A=28, C10A=37, C16A=59
Durchmesser	53,00 mm	max. Einschaltstrom	10A/300µs
Gewicht	53 g	kapazitive Last	200µF

Article No.: 862212

Power supply unit, ROUND, CC, RS350mA/8W












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	100-240V AC/50-60Hz
Power	3,20-8,00 W	Power factor	0,9
Output voltage	9-23V DC	Connection possibility	wire with open ends
Output current	350 mA		

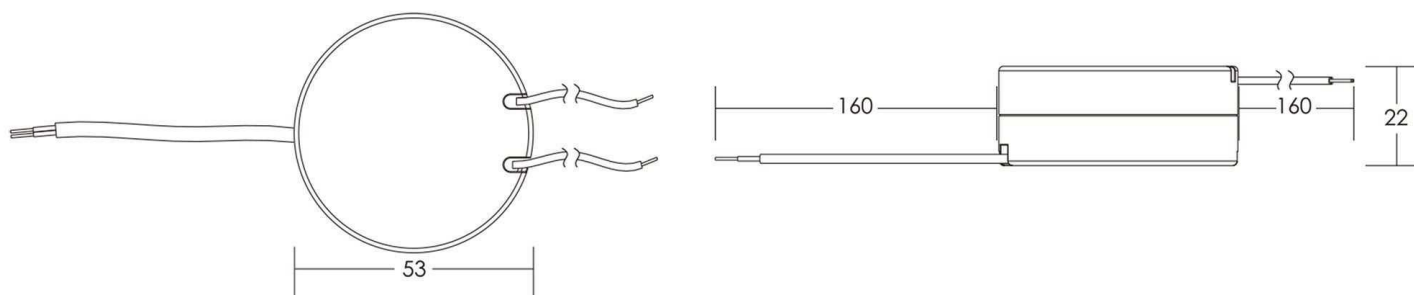
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862212

Power supply unit, ROUND, CC, RS350mA/8W

**Dimensions & Weight****Absolute maximum ratings**

Length	0,00 mm	Operating temperature	-20°C - +50°C
Width	0,00 mm	Case temperature	80 °C
Height	22,00 mm	max. amount of circuit breakers	B10A=17, B16A=28, C10A=37, C16A=59
Diameter	53,00 mm	max. inrush current	10A/300µs
Product weight	53 g	capacitive load	200µF