

**Artikel Nr.: 872646**

Netzgerät, BASIC, DIM, CC, D70022U/22W



IP20 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	9,80-22,00 W	Leistungsfaktor	0,95
Ausgangsspannung	14-32V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	700 mA		

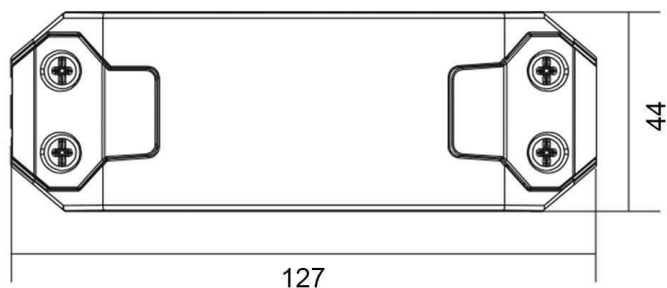
**Produkteigenschaften**

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872646**

Netzgerät, BASIC, DIM, CC, D70022U/22W

**Abmessungen und Gewicht****Grenzwerte**

Länge	127,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	44,00 mm	Gehäusetemperatur	90 °C
Höhe	28,00 mm	max. Menge Sicherungsautomaten	B10A=11, B16A=18, C10A=24, C16A=39
Durchmesser	0,00 mm	max. Einschaltstrom	15A/300µs
Gewicht	120 g	kapazitive Last	35,22pF

**Article No.: 872646**

Power supply unit, BASIC, DIM, CC, D70022U/22W



IP20

**Electrical Characteristics**

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	9,80-22,00 W	Power factor	0,95
Output voltage	14-32V DC	Connection possibility	wire with open ends
Output current	700 mA		

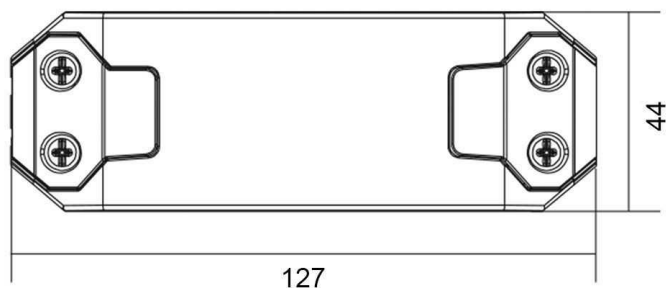
**Product features**

Protection class II	Overvoltage protection
SELV Low voltage protection	Lamp control gear 110
Short circuit protection	Suitable for furniture installation
Overload protection	ErP Standby-power consumption < 0,5 W
Overheating protection	LVD Safety according to EN 61347
Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
dimmable - leading/trailing edge	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872646**

Power supply unit, BASIC, DIM, CC, D70022U/22W

**Dimensions & Weight****Absolute maximum ratings**

Length	127,00 mm	Operating temperature	-20°C - +45°C
Width	44,00 mm	Case temperature	90 °C
Height	28,00 mm	max. amount of circuit breakers	B10A=11, B16A=18, C10A=24, C16A=39
Diameter	0,00 mm	max. inrush current	15A/300µs
Product weight	120 g	capacitive load	35,22pF