## Art. no. 730496


## Bollard light Facado II angular, tinted, 650 mm, 1x max. 20 W, E27, grey





Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides even better illumination. The FACADO light is made from highquality die-cast aluminium and available in dark grey or rust and in square or rounded designs.

The IP67 connection box features a double M20 cable gland suitable for buried cables in sizes  $3 \times 1.5 \text{ mm}^2$ ,  $5 \times 1.5 \text{ mm}^2$  or  $3 \times 2.5 \text{ mm}^2$ , and more.

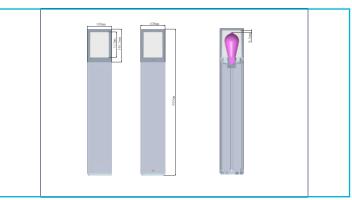

## Special features

.

- IP65 weather resistance IP67 connection box suitable for buried cables 3x1.5 mm²/5x1.5
- IP67 connection box suitable for buried cables 3x1.5 mm<sup>2</sup>/ mm<sup>2</sup>/3x2.5 mm<sup>2</sup>, and more
- newly designed lamp head for improved illumination
- available with an opal diffuser or a transparent diffuser with smoked glass
- ideal for e.g. ST64 bulbs and A60/70 bulbs

Housing Material Housing Color Housing Surface Material of Lens Colour of Lens	Aluminium, Polycarbonate Dark grey Matt Polycarbonate - PC Smoke-coloured
Protection Class	Protection class I/protective grounding
max. Power	1x max. 20 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	E27
Illuminant Design	A60, A70, ST64
Socket Quantity	1
Connection Type	Connectionbox
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Light Exit Surfaces	5
Light characteristics	Direct
Light direction	Top, Side
Length Width Height	108 mm 108 mm 650 mm
Working Temperature Storage Temperature IP Protection Class	-20 to 40 °C -10 to 60 °C IP 65